



February 20, 2015

E-FILING

Carlotta S. Stauffer, Director  
Division of Commission Clerk and Administrative Services  
Florida Public Service Commission  
2540 Shumard Oak Boulevard  
Tallahassee, FL 32399

RE: Docket No. 140060-WS; Application for increase in water and wastewater rates in Seminole County by Sanlando Utilities Corporation  
Our File No.: 30057.214

Dear Ms. Stauffer:

It has become apparent that in order to remain in compliance with environmental requirements, Sanlando Utilities corporation is compelled to immediately replace the air header at it Wekiva WWTP. We believe the expense of this project should be included in the current rate case.


Approximately 240 lineal feet of 20" diameter air header pipe located at Sanlando Utilities' Wekiva Wastewater Treatment Plant is in immediate need of replacement. This pipe line is critical in conveying process air flow to the Wekiva Plant's treatment trains in order to maintain the viability of the biological treatment process in conformance with NPDES Operating Permit No. FL00336251 and DEP Rule 62-600.410(1) F.A.C. that states as follows: "All domestic wastewater treatment plants shall be operated and maintained in accordance with the applicable provisions of this chapter and so as to attain, at a minimum, the reclaimed water or effluent quality required by the operational criteria specified in this chapter, and to meet the appropriate domestic wastewater residuals management criteria specified in Chapters 62-2, 62-7, 62-640 and 62-701, F.A.C."

After making numerous repairs to the existing pipe without sustained success, it is evident that this air header is at the end of its service life. The replacement pipe will consist of 20" steel material rated for high temperature so as to insure its long term performance under typical operating conditions. The existing air header was installed in 1973 when the treatment plant was constructed and will be retired after 42 years of service.

Attached is a signed proposal from Sunshine Building and Development that identifies the total project cost of \$38,634.21 to replace the 240 lineal feet of pipe header. The work is currently under way with an expected completion date of no later than March 31, 2015. The steel pipe has been delivered to the site and the contractor has mobilized his resources to quickly complete the work. Once the work is completed, Sanlando will provide a copy of the invoice confirming payment.

If you or the Staff have any questions, please feel free to contact me.

Very truly yours,

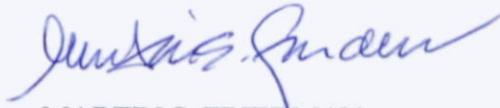

MARTIN S. FRIEDMAN  
For the Firm

MSF/  
Enclosure

cc: John Hoy (via e-mail)  
Patrick Flynn (via e-mail)  
Darrien Pitts (via e-mail)  
Keino Young, Esquire (via e-mail)  
Robert Graves (via email)  
John Truitt, Esquire (via e-mail)

# Sunshine Building and Development Corp.

POST OFFICE BOX 180958 / CASSELBERRY, FLORIDA 32718-0958 / PHONE (407) 339-6721 / FAX (407)339-2905

December 15, 2014

Scott Gosnell  
Sanlando Utilities Corp.  
Wekiva Plant  
144 Ledbury  
Longwood, FL 32750

Via Fax: 407-682-5713


Re: 20" Air Line At Wekiva Plant

Dear Scott:

We propose to furnish 20" steel pipe and fittings, connect to existing steel pipe and to existing DIP outside of compressor building, for a lump sum price of thirty eight thousand six hundred thirty four dollars and twenty one cents (\$38,634.21).

Thank you for the opportunity to quote you on this.

Very truly yours,

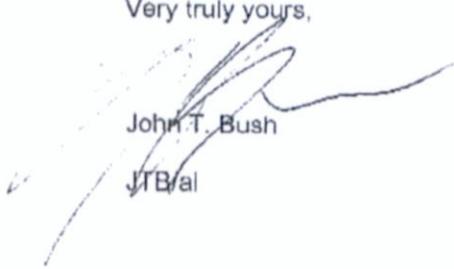

John T. Bush

JTB/al

Accepted.  2/2/15  
Bryan K. Gange, R.M.